




HUTCHINS

MANUFACTURING COMPANY • PO Box 5668
Quality Products for All Phases of Surface Preparation
www.hutchinsmfg.com

the PROFINISHERS®


Pasadena, California 91117
Phone: 626-792-8211
Fax: 626-792-8574

To remove the pad on the ProFinisher 504/505

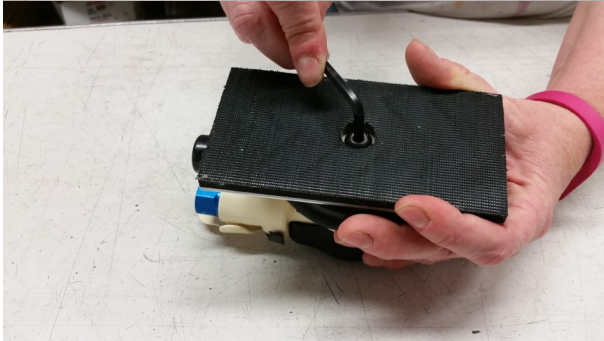

1. Disconnect the tool from your airline
2. Have the 5/32" allen wrench which was included with your sander
3. Place the sander on your surface with the pad facing up
4. Insert the short end of the 5/32" allen wrench into the center screw
5. Push down on the pad as you turn the allen wrench and break the seal
6. Remove the wrench and re-insert the long end
7. While pushing down on the pad, turn the allen wrench until the screw fully releases

Tip for Installing the pad on the ProFinisher 504/505

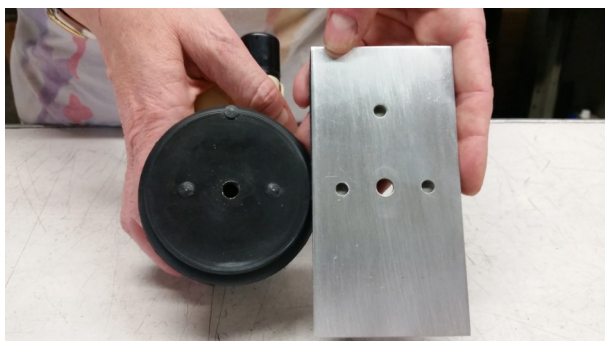

1. When installing a new pad, make sure you line up the 3 black nubs on the bottom of the boot with the three outer holes on the pad.